

Quick Installation Guide

TGPS-9168GT-M12-BP2-24V




EN50155 24-port managed
Gigabit PoE Ethernet switch

Introduction

ORing's Transporter™ series managed PoE Ethernet switches are designed for industrial applications, such as rolling stock, vehicle, and railway applications. **TGPS-9168GT-M12-BP2-24V** is managed Redundant Ring Ethernet switch with 16x10/100/1000Base-T(X) P.S.E. and 8x10/100/1000Base-T(X) ports which is specifically designed for the toughest and fully compliant with EN50155 requirement. The switch support Ethernet Redundancy protocol, O-Ring (recovery time < 30ms over 250 units of connection), O-Chain and MSTP/RSTP/STP (IEEE 802.1s/w/D) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. **TGPS-9168GT-M12-BP2-24V** also support Power over Ethernet, a system to transmit electrical power up to 30 watts, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. Each **TGPS-9168GT-M12-BP2-24V** switch has 16x10/100/1000Base-T(X) P.S.E. (Power Sourcing Equipment) ports. P.S.E. is a device (switch or hub for instance) that will provide power in a PoE connection. **TGPS-9168GT-M12-BP2-24V** can also be managed centralized and convenient by Open-Vision, Except the Web-based interface, Telnet and console (CLI) configuration. Therefore, the switch is one of the most reliable choices for EN50155 highly-managed Ethernet application.

Package Contents





The device is shipped with the following items. If any of these items is missing or damaged, please contact your customer service representative for assistance.

Contents	Pictures	Number
TGPS-9168GT-M12-BP2-24V		1
CD		1
QIG		1


Preparation

Before you begin installing the device, make sure you have all of the package contents available and a PC with Microsoft Internet Explorer 6.0 or later, for using web-based system management tools.


Safety & Warnings

-  **Elevated Operating Ambient:** If installed in a closed environment, make sure the operating ambient temperature is compatible with the maximum ambient temperature (T_{ma}) specified by the manufacturer.
-  **Reduced Air Flow:** Make sure the amount of air flow required for safe operation of the equipment is not compromised during installation.
-  **Mechanical Loading:** Make sure the mounting of the equipment is not in a hazardous condition due to uneven mechanical loading.
-  **Circuit Overloading:** Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.

Dimension Unit =mm (Tolerance ±0.5mm)

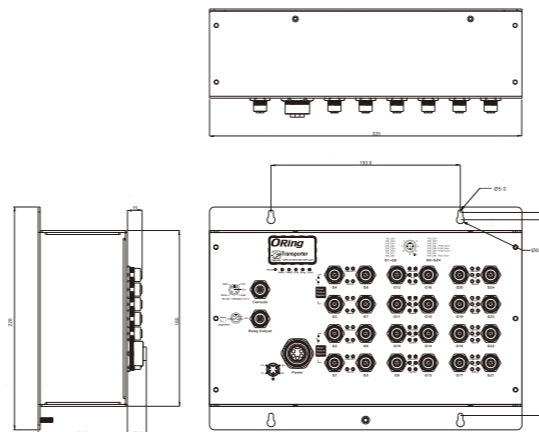

Panel Layouts

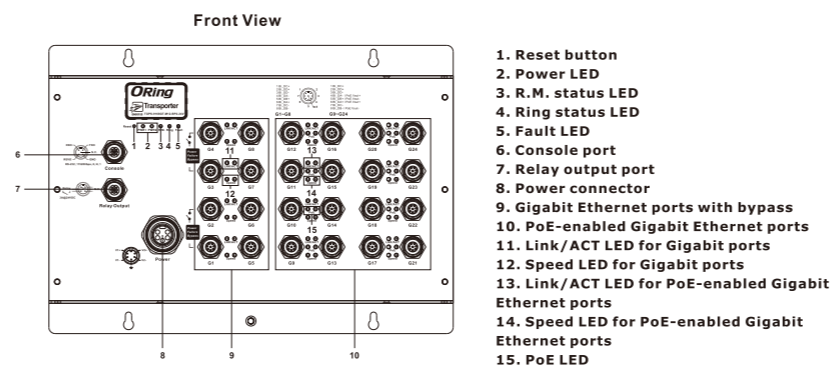

Installation


Wall-mount


The device can be fixed to the wall. Follow the steps below to install the device on the wall.

Step 1: Hold the device upright against the wall

Step 2: Insert four screws through the large opening of the keyhole-shaped apertures at the top and bottom of the unit and fasten the screws to the wall with a screwdriver.

Step 3: Slide the device downwards and tighten the four screws for added stability.



-  Instead of screwing the screws in all the way, it is advised to leave a space of about 2mm to allow room for sliding the switch between the wall and the screws.

Wiring

For pin assignments of power, console and relay output ports, please refer to the following tables.

Grounding

Grounding and wire routing help limit the effects of noise due to electromagnetic interference (EMI). Run the ground connection from the grounding pin on the power connector to the grounding surface prior to connecting devices.

Power port pinouts


The device supports two sets of power supplies and uses the M23 5-pin female connector on the front panel for dual power inputs.

Step 1: Insert a power cable to the power connector on the device.

Step 2: Rotate the outer ring of the cable connector until a snug fit is achieved. Make sure the connection is tight.



Console port pinouts

 The switch has one RS-232 (M12 5pin) console port, located on the front panel. Use a M12-to-DB9 console cable to connect the console port to your PC's COM port.



Relay output port pinouts

The switch uses the M12 A-coded 5-pin female connector on the front panel for relay output. Use a cable with an M12 A-coded 5-pin male connector to connect the relay. The relay contacts will detect user-configured events and form an close circuit when an event is triggered.



Network Connection

The device provides Ethernet ports in M12 connector type. According to the link type, the switch uses CAT 3, 4, 5, 5e UTP cables to connect to any other network devices (PCs, servers, switches, routers, or hubs). Please refer to the following table for cable specifications.

Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3, 4, 5 100-ohm	UTP 100 m (328 ft)	M12 A-coding connector
100BASE-TX	Cat. 5 100-ohm UTP	UTP 100 m (328 ft)	M12 A-coding connector
1000BASE-T	Cat. 5/Cat. 5e 100-ohm UTP	UTP 100 m (328 ft)	M12 A-coding connector

For pin assignments of the Ethernet ports, please refer to the following tables.



8-Pin Gigabit Non-PoE Port Definition		8-Pin Gigabit PoE Port Definition	
PIN	Definition	PIN	Definition
1	BI_DC+	1	BI_DC+
2	BI_DD+	2	BI_DD+
3	BI_DD-	3	BI_DD-
4	BI_DA-	4	BI_DA- with PoE Vout+
5	BI_DB+	5	BI_DB+ with PoE Vout-
6	BI_DA+	6	BI_DA+ with PoE Vout+
7	BI_DC-	7	BI_DC-
8	BI_DB-	8	BI_DB- with PoE Vout-

Quick Installation Guide

TGPS-9168GT-M12-BP2-24V

EN50155 24-port managed Gigabit PoE Ethernet switch

Configurations

After installing the switch and connecting cables, the green power LED should turn on. Please refer to the following table for LED indication.

LED	Color	Status	Description
PWR1	Green	On	DC power module 1 activated
PWR2	Green	On	DC power module 2 activated
R.M	Green	On	Device operating in Ring Master mode
Ring	Green	On	Ring enabled
		Blinking	Ring structure is broken
Fault	Amber	On	Errors occur (i.e. power failure or port malfunctioning)
10/100/1000Base-T(X) P.S.E Ethernet ports			
LNK/ACT	Green	On	Port is linked
		Blinking	Transmitting data
PoE	Green	On	Power supplied over Ethernet
Speed	Green	On	Port is running at 1000Mbps
		Amber	Port is running at 100Mbps
		Green/Amber	Port is running at 10Mbps
10/100/1000Base-T(X) Ethernet ports			
LNK/ACT	Green	On	Port is linked
		Blinking	Transmitting data
Speed	Green	On	Port is running at 1000Mbps
		Amber	Port is running at 100Mbps
		Green/Amber	Port is running at 10Mbps

Follow the steps below to log in and access the system:

1. Launch the Internet Explorer and type in IP address of the device. The default static IP address is **192.168.10.1**



2. Log in web UI:

For K9 or K12 Ver.: both are "admin"



S12 cybersecurity Ver.:

Set new password



Used ID "admin" and new set password to log in



3. After logging in, you should see the following screen.



Resetting

To reboot the switch, press the **Reset** button less than 5 seconds.

To restore the switch configurations back to the factory defaults, press the **Reset** button more than 5 seconds.

Specifications

ORing Switch Model	TGPS-9168GT-M12-BP2-24V
Physical Ports	
10/100/1000 Base-T(X) with P.S.E. Ports in M12 Auto MDI/MDIX	16 x M12 connector (8 pin female A-coding)
10/100/1000Base-T(X) ports in M12 Auto MDI/MDIX	8 x M12 connector (8-pin female A-coding with 2 x bypass function included)
Technology	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control IEEE 802.3ad for LACP (Link Aggregation Control Protocol) IEEE 802.1p for COS (Class of Service) IEEE 802.1Q for VLAN Tagging IEEE 802.1d for STP (Spanning Tree Protocol) IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol) IEEE 802.1x for Authentication IEEE 802.1AB for LLDP (Link Layer Discovery Protocol) IEEE 802.3af/at PoE specification
MAC Table	8K
Priority Queues	8
Processing	Store-and-Forward
Switch Properties	Switching latency: 7 us Switching bandwidth: 48 Gbps Max. Number of Available VLANs: 4095 IGMP multicast groups: 128 for each VLAN Port rate limiting: User Define
Jumbo frame	Up to 9.6K Bytes
Security Features	Device Binding security feature Enable/disable ports, MAC based port security Port based network access control (802.1x) VLAN (802.1Q) to segregate and secure network traffic Radius centralized password management SNMPv3 encrypted authentication and access security Https / SSH enhance network security
Software Features	STP/RSTP/MSTP (IEEE 802.1D/w/s) Redundant Ring (O-Ring) with recovery time less than 30ms over 250units TOS/Diffserv supported Quality of Service (802.1p) for real-time traffic VLAN (802.1Q) with VLAN tagging and GVRP supported IGMP Snooping IP-based bandwidth management Application-based QoS management DOS/DDOS auto prevention Port configuration, status, statistics, monitoring, security DHCP Server / Client support SNTP, NTP for synchronizing of clocks over network SMTP Client Modbus TCP
Network Redundancy	O-Ring O-Chain MRP MSTP (RSTP/STP compatible)
RS-232 Serial Console Port	RS-232 in M12 (5-pin M12 female A-coding) connector with console cable. 115200bps, 8, N, 1
Fault Contact	
Relay	Relay output to carry capacity of 3A at 24VDC on M12 connector (5-pin M12 female A-coding)
Power	
Redundant Input Power	Dual DC inputs. 24 (16.8~30VDC) on 5-pin M23 female connector
Power Consumption(Typ.)	26 Watts (power consumption of P.S.E. is not included)
PoE Output Power	<24VDC@75Watts max. ≥24VDC@120Watts max.
Overload Current Protection	Present
Reverse Polarity Protection	Present
Physical Characteristic	
Enclosure	IP-30
Dimension (W x D x H)	320(W) x 91.3(D) x 228(H) mm (12.6 x 3.59 x 8.98 inch.)
Weight (g)	3463 g

Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 75°C (-40 to 167°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory Approvals	
EMC	CE EMC (EN 55024, EN 55032), FCC Part 15 B, EN 50155(EN 50121-1, EN 50121-3-2)
EMI	EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15 B class A
EMS	EN 55024 (IEC/EN 61000-4-2 (ESD: Contact 4kV, Air 8kV), IEC/EN 61000-4-3 (RS 80MHz to 1GHz: 3V/m 1kHz 80% AM), IEC/EN 61000-4-4 (EFT Power 0.5kV, Signal 0.5kV), IEC/EN 61000-4-5 (Surge: Power 0.5kV, Ethernet 1kV), IEC/EN 61000-4-6 (CS 150K-80MHz: 3Vrms 1kHz 80% AM), IEC/EN 61000-4-8(PFME), IEC/EN 61000-4-11 (DIP)) EN 50121-3-2 (IEC/EN 61000-4-2 (ESD: Contact 6kV, Air 8kV), IEC/EN 61000-4-3 (RS 80MHz/1.4G/2G/5.1GHz to 1G/2G/2.7G/6GHz: 3V/5V/10V/20V/m 1kHz 80% AM), IEC/EN 61000-4-4 (EFT Power 2kV, Signal 2kV), IEC/EN 61000-4-5 (Surge: Power 2kV, Ethernet 2kV), IEC/EN 61000-4-6 (CS 150K-80MHz: 10Vrms 1kHz 80% AM))
Shock	IEC60068-2-27
Free Fall	IEC60068-2-31
Vibration	IEC60068-2-6
Safety	EN 62368-1 (LVD)
Other	EN 50155 (IEC 61373)
MTBF	161,351hrs.
Warranty	5 years



Copyright© 2025 ORing
All rights reserved.



ORing Industrial Networking Corp.

TEL: +886-2-2218-1066 Website: www.oringnet.com
FAX: +886-2-2218-1014 E-mail: support@oringnet.com